

Mu3002 E3


High Voltage Universal Grid PCB Tester



www.masone.com

MU2000 E3

High Voltage Universal Grid PCB Tester

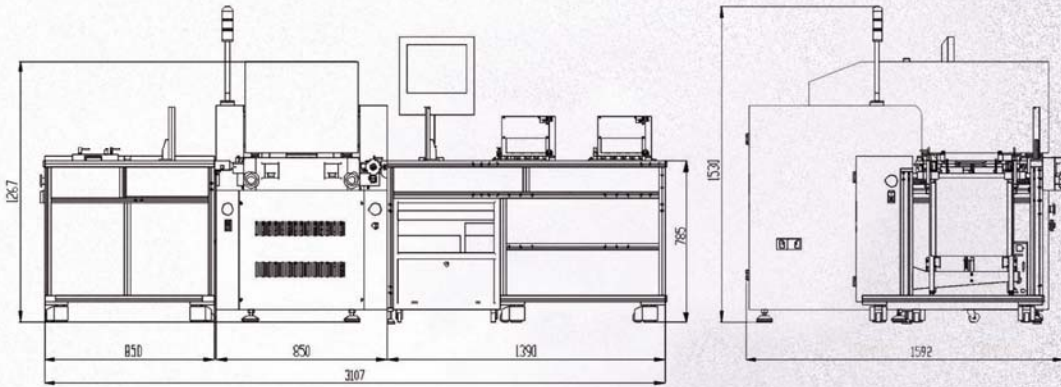

Item

Specification

Test point(option)	96304(Max)/Quad Density
Test area	12.8"X9.6"
Density	50mil(quad density),70mil(double density)
Fixture spec.	Can be compatible L&M400 12.8"X9.6" rigid fixture,
Net list format	Mason MXG format(Can be convert to L&M format)
Isolation test voltage	50V-300V±10%
Isolation test threshold	1MΩ-100MΩ±10%
Continuity test	10Ω-100Ω±10%
Merged resistors test	10Ω-200KΩ±10%(option)
Carbolic resistor test	200Ω-20KΩ±10%
Test speed	6000-8000Points/sec(upon 20000points)
Power supply	AC380V±10% 3-phase 5wires
Temperature and humidity	10°C-25°C /less than70%/No condensation
Air supply	6-7kgf/cm2
Weight	2500KG
Size	3107mm(L)X1592mm(W)X1530(H)

SHENZHEN MASON ELECTRONICS CO.,LTD

Tel:86-755-26987698

<http://www.masone.com>

VIKING TEST SERVICES

Tel:+44 (0) 1420 537020
<http://www.vikingtest.com>

Fax:86-755-26987611

E-mail:masone@masone.com

Fax:+44(0)1420 538950

E-mail:sales@vikingtest.com

